

# 14x190mm T&G Engineered Flooring

## Technical Data Sheet


Foxtail - WCC008



### Product Photo:



### Board Construction:

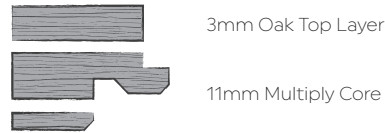

### Product Specification & Handling Information:

Board Depth:	14/3mm
Board Width:	190mm
Board Length:	1900mm
Pack Size:	2.888m <sup>2</sup>
Pack Weight:	26.28kg
Packs Per Pallet:	40

### Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	650 kg/m <sup>3</sup>
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.16 W/mK

### Board Detail:

Type of Board:	1-Strip Engineered Wood Flooring
Finish:	Brushed & UV Oiled
Bevel Detail:	4V Bevel
Density of Finish:	NPD
Fix System:	T&G
Grade:	Rustic
Core Material:	Eucalyptus & Poplar
Janka Reading:	1360

### Misc Items:

Residential Warranty:	On Request
Commercial Warranty:	On Request
Oak Origin:	Europe
Manufactured In:	PRC
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 27°C

### Key Features:



### Accreditations:



Woodcraft is a brand imported for Heritage Woodcraft Limited.

Heritage House, Wheatfield Way, Hinckley, Leicestershire, LE10 1YG

©Copyright 2024

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.