14x190mm T&G Engineered Flooring Technical Data Sheet



Natural Oak: Brushed & Oiled - HWC1902

Product Photo:




Product Specification & Handling Information:

Board Depth:	14/3mm	
Board Width:	190mm	
Board Length:	1900mm	
Pack Size:	2.888m²	
Pack Weight:	25kg	
Packs Per Pallet:	40	

Board Detail:

Type of Board:	1-Strip Engineered Wood Flooring	
Finish:	Brushed & Oiled	
Bevel Detail:	4V Bevel	
Density of Finish:	60g/m²	
Fix System:	T&G	
Grade:	Rustic	
Core Material:	Eucalyptus & Poplar	
Janka Reading:	1360	

Board Construction:

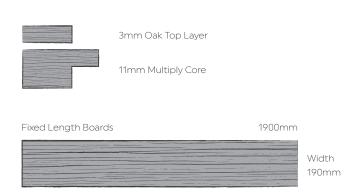

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three-layer Flooring Board	
Reaction to Fire:	Dfl - s1	
Minimum Density:	650 kg/m³	
Minimum Thickness:	14mm	
Formaldehyde:	E-1	
Thermal Conductivity:	0.12 W/mK	

Misc Items:

Residential Warranty:	On Request		
Commercial Warranty:	On Request		
Oak Origin:	Europe		
Manufactured In:	PRC		
Installation Type:	V	Float	
	V	Bond	
	V	Nail	
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay Manifold temp must not exceed 27°C		

Key Features:



Accreditations:



$\label{eq:constraint} \mbox{Heritage Engineered Collection is a brand imported for Heritage Woodcraft Limited.}$

Heritage House, Wheatfield Way, Hinckley, Leicestershire, LE10 1YG

©Copyright 2024

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.